


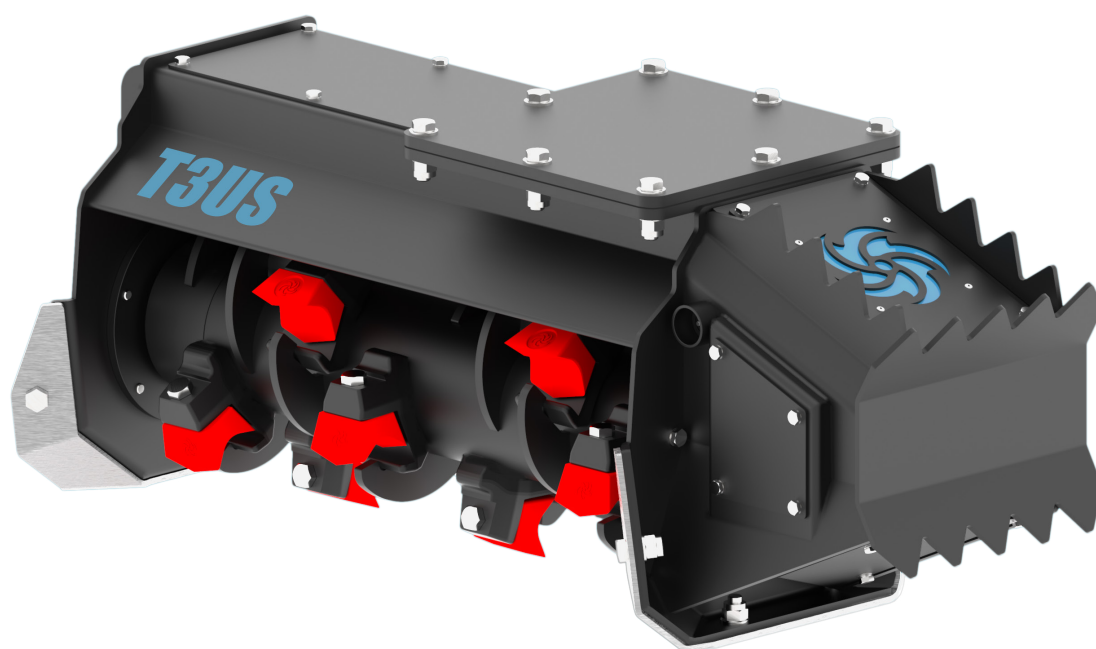

T3 US

For excavators
2.5–7.0 ton

SPECIFICATIONS


		T3US DFD50	T3US DFD75	T3US DFD100
ton		2.5–4.0	4.0–5.5	5.5–7.0
cm inch		50 20	75 30	100 40
cm inch		86x43x45 34x17x18	111x43x45 44x17x18	136x43x45 54x17x18
kg lbs		170 374	200 440	230 506
cc		12	16	20
L/min gal/min		35 9	45 12	55 15
bar (min-max) psi (min-max)		180–250 2.600–3.600	180–250 2.600–3.600	180–250 2.600–3.600
transmission		direct	direct	direct
rotor diameter cm inch		32 13	32 13	32 13
tools		10	14	18
		5700 €	6000 €	6300 €

DFD



STANDARD EQUIPMENT

HF22
Ø max 12 cm (5")



TECHNICAL FEATURES AND STANDARD EQUIPMENT

- » Direct transmission
- » Internally reinforced with double metal sheet
- » Two rows forged and hardened counter-blades
- » Funnel-shaped frame for higher cutting capacity
- » Fixed thumb bracket built into the frame
- » interchangeable side skids
- » Helicoidal DFD Rotor, double edge fixed teeth with bite limiter
- » Internally reinforced double-case body with interspace
- » Front hood delete. Fully unrestricted rotor for increased cutting capacity
- » Inside Rotor Supports with "labyrinth" for the protection of the bearings from the impurities
- » Double Row roller adjustable bearings of 1st quality
- » Valves block complete with priority valve for adjusting oil flow, anti-shock valve (pressure relief valve), anti-cavitation
- » Cast iron gear motor
- » Protective cover for motor



ACCESSORIES

- » Mounting hitch (pins version) 1.2-4.0 ton **300 €**
- » Pins kit 1.2-4.0 ton **50 €**
- » Quick hitch 1.2-4.0 ton (Klac, Came, Lehnhoff, Cangini) **600 €**
- » Mounting hitch (pins version) 4.1-8.0 ton **400 €**
- » Pins kit 4.1-8.0 ton **80 €**
- » Quick hitch 4.1-8.0 (Klac, Came, Lehnhoff, Cangini) **800 €**
- » Hoses kit Lg. 2 meters **130 €**
- » Self-levelling support (+40 kg / 88 lbs) **580 €**



HYDRAULIC MOTOR RANGE

 ton	2.5-4.0	4.0-5.5	5.5-7.0
 cc	12	16	20
 L/min gal/min	35 9	45 12	55 15