

AQUILA SUPER - AQUILA SUPER RAPIDO

Folding frame (from 150 HP)




Enhanced versatility and reliability for large-scale operations

AQUILA SUPER stands out for its robust mechanics, making it ideal for contractors and medium-to-large farms seeking versatility and reliability. This model features patented "BLINDATO" sealed bearing, the use of synthetic oil in the gearboxes, high-strength steel side plates, and telescopic side PTO guards. The leveling bar has a depth of 20cm which optimizes soil refinement. This model's operating range is between 150 and 350 HP.

Forced air cooling

Starting from the AQUILA SUPER model, cooling fans come standard and act on the side gearboxes. This system keeps operating temperatures under control, even under prolonged stress.

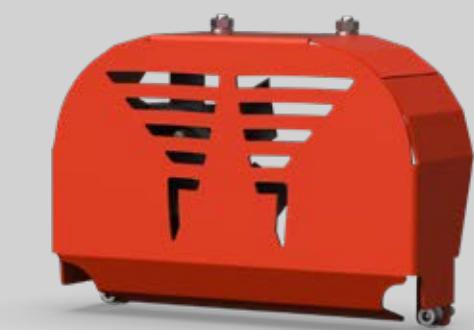

Quick-latch pto guard

Assembly, disassembly, and maintenance of the PTO shaft have been greatly simplified thanks to a quick-latch protective guard. It opens easily with a few manual actions, using two locking clips—streamlining maintenance operations.





Combi kit with seeding bar exclusion

The combi kit with seed bar exclusion is compatible exclusively with AQUILA SUPER, AQUILA SUPER-RAPIDO, and TORO SUPER-RAPIDO models. It offers improved maneuverability and optimized headland soil preparation. The exclusion system allows the openers to be lifted up to 8 cm from the working plane, enabling use of the rotary harrow alone without subjecting seeding elements to unnecessary stress or wear.

	AQUILA SUPER	AQUILA SUPER RAPIDO
MODEL	4.600 - 5.000 - 6.000	
Working width (m)	4,6 - 5 - 6	4,6 - 5 - 6
Hitch category (type)	III [^] - IV [^]	III [^] - IV [^]
Tractor power (HP)	150 - 320	150 - 350
PTO (rpm)	1.000	1.000
Blades (n°)	36 - 40 - 48	36 - 40 - 48
Working depth(cm)	26	28
Stone deflector	optional	standard
Hydraulic roller adjustment	optional	standard
Weight* (kg)	2.930 - 3.145 - 3.450	2.980 - 3.250 - 3.600

*Weight indicated with Ø 450mm CAGE roller

