



Mod. NEXT SP. Mod. NEXT AVANT

TRINCIA - BROYEUR - SHREDDER - HÄCKSLER
DESBROZADORA - ИЗМЕЛЬЧИТЕЛЬ



Per la trinciatura di erba, residui di potature medio-leggere, residui vegetali in generale

Pour le broyage des herbes, sarments légers-moyennes, résidus végétaux en general

For the chopping of grass, light-medium prunings, vegetal residuals in general

Für das Häckseln von Gras/Weideflächen, leicht oder mittel Baumschnitte, Pflanzenresten im Allgemein

Para trincar hierbas, residuos de poda medio-ligeros, restos vegetales en general

Для измельчения травы, остатков срезанных веток средне-легких, растительных остатков



Mod. NEXT SP. – NEXT AVANT



40-60 HP

FALC

NEXT SP. NEXT AVANT										
	Kg.	LBS	A mm.	B mm.	A inches	B inches	N.	HP.	PTO	N.
1350	390	860	1382	1555	54,40	61,22	18	40 - 60	540 (1000)	3
1500	415	914	1524	1697	60,00	66,81	20	40 - 60	540 (1000)	3
1800	458	1010	1808	1981	71,18	77,99	24	40 - 60	540 (1000)	3
2100	509	1123	2092	2265	82,36	89,17	28	40 - 60	540 (1000)	4

A



- Rullo posteriore
- Controcotello
- Spostamento idraulico mm 400
- Perni filettati con dado (A)



- Rouleau arrière
- Contre couteau
- Déportable hydraulique mm 400
- Axes filetés avec écrou (A)



- Rear roller
- Counter blade
- Hydraulic offset mm 400
- Axles with nut (A)





- Hinterer Walze
- Gegenmesser
- Hydraulische Verschiebung mm 400
- Gewindebolzen mit Muttern (A)



- Rodillo posterior
- Contracuchilla atornillada
- Movimiento hidráulico mm 400
- Pernos roscado con tuerca (A)



- Заднего катка
- Контрлезвие
- Гидравлическое смещение 400 мм
- Штыри с резьбой с гайкой (A)



Invertendo la posizione delle pulegge si passa da PTO 540 a PTO 1000

Inversant la position des poulies on passe de PDF 540 à PDF 1000

Inverting the position of the pulleys you change from PTO 540 to PTO 1000

Um die Umdrehung von 540 bis 1000 zu wechseln, muss man die Riemenscheiben vertauschen

Invertiendo la posición de las poleas, se pasa de TDF 540 a TDF 1000

Инверсия положение шкивов переходе от BOM 540 BOM 1000


Mod. NEXT AVANT




40-60 HP

FALC

-  ABBINABILE ANTERIORMENTE E POSTERIORMENTE AL TRATTORE
-  IL PEUT ENTRE MONTÉ À L'AVANT OU A L'ARRIÈRE DU TRACTEUR
-  IT CAN BE FITTED BOTH IN THE FRONT AND BACK OF THE TRACTOR
-  FÜR FRONT UND HECKANBAU
-  ACOPLABLE AL TRACTOR ANTERIORMENTE Y POSTERIORMENTE
-  МОЖНО ПОДСОЕДИНИТЬ СПЕРЕДИ ИЛИ СЗАДИ ТРАКТОРА

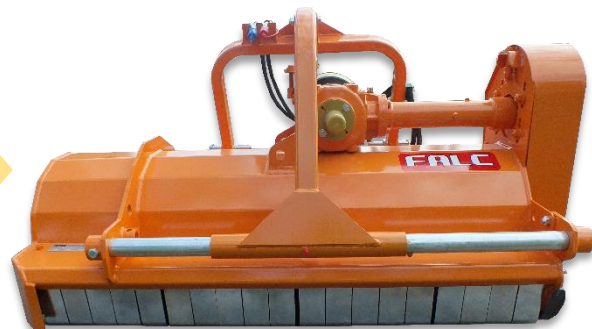

 OPZIONE  OPTION  OPTION  OPTION  OPCIÓN  ОПЦИЯ

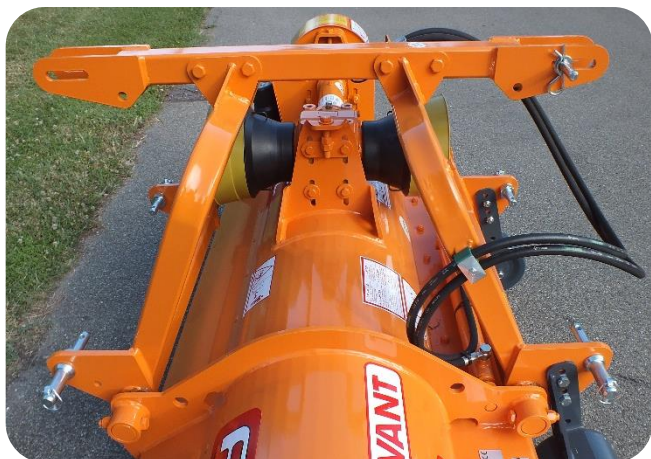


-  CON ATTACCO A 3 PUNTI DOPPIO
-  AVEC ATTELAGE 3 POINTS DOUBLE
-  WITH DOUBLE 3 POINT HITCH
-  MIT DOPPEL 3-PUNKT- ANHÄNGUNG
-  CON DOBLE ENGANCHE DE TRES PUNTOS
-  С ДВОЙНОЙ ТРЕХТОЧЕЧНОЙ НАВЕСКОЙ

Mod. NEXT SP. – NEXT AVANT



40-60 HP

FALC

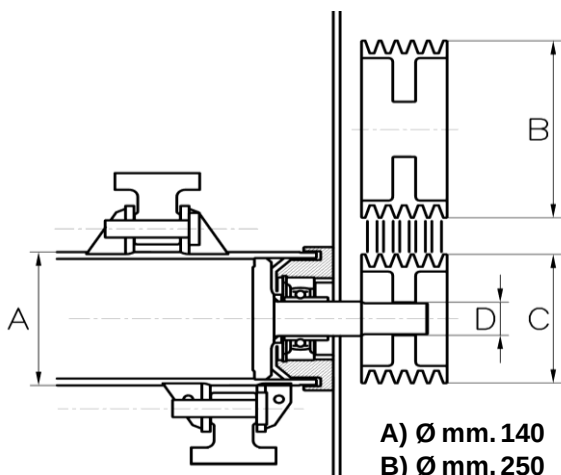

A) Ø mm. 140 inches 5,51
B) Ø mm. 250 inches 9,84
C) Ø mm. 180 inches 7,09
D) Ø mm. 40 inches 1,57

NEXT SP / AVANT	 mm 	 inches 
1350	780 602 380 1002	30,71 23,70 14,96 39,45
1500	780 744 380 1144	30,71 29,29 14,96 45,04
1800	780 1028 380 1428	30,71 40,47 14,96 56,22
2100	780 1312 380 1712	30,71 51,65 14,96 67,40

 OPZIONE  OPTION  OPTION  OPTION  OPCIÓN  ОПЦИЯ

Coppia ruote anteriori in ferro Ø 190 
Couple de roues antérieures en fer Ø 190 
Pair of front iron supporting wheels Ø 190 
Paar Vorderräder aus Eisen Ø 190 
Par de ruedas anteriores en hierro Ø 190 
Пара передних металлических колес Ø 190 



 Coppia slitte fisse
 Couple patins fixes
 Pair of fix skids
 Paar feste Kufen
 Par patines fijos
 Пара фиксированных лыж

FALC

Via Proventa, 41
48018 Faenza (Italia)
Tel. +39 0546 29050
Fax +39 0546 663986

www.falc.eu | info@falc.eu

